



Easy Screen Installation

EASY SCREEN SPECIFICATIONS

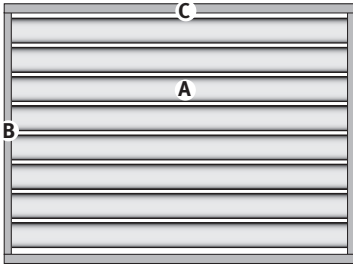

Max width 2000mm

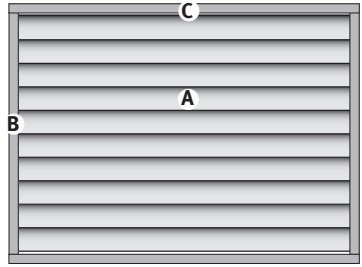

Max width 2000mm

Max height 2000mm

SLAT

(PART A) Blades
76x16x1994mm

(PART B) Slat End Rails
20x20x2000mm

(PART C) Slat Top/Bottom Rails
25x25x2000mm

(Rails and Blades can be cut to fit the size you require)

LOUVER

(PART A) Blades
76x16x1994mm

(PART B) Louver End Rails
L & R required 50x25x2000mm

(PART C) Louver Top/Bottom Rails
55x25x2000mm

Fixing Brackets – 25x20 angle x 80mm – packs of 4


Screws – Wafer Head 16mm long – packs of 50

(4 screws required per blade and 8 screws per Top/Bottom Rail)


BLADE CALCULATOR

The calculator shows at a glance the number of blades (PART A) required to fit maximum height 2000mm.

SLAT

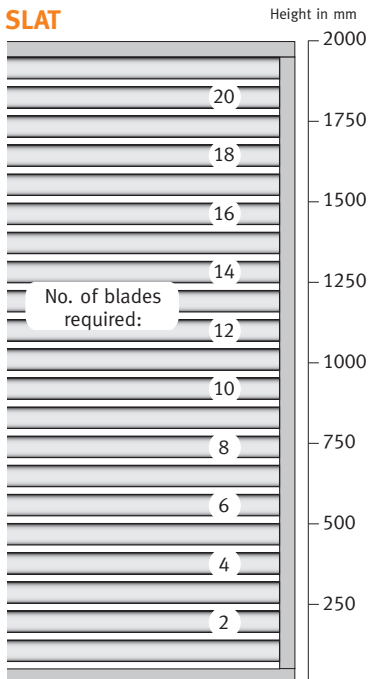

LOUVER

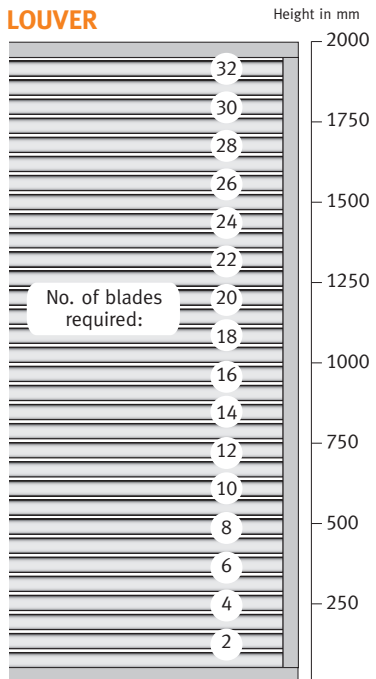




HOW TO ASSEMBLE YOUR EASY SCREEN

Tools Required: Tape Measure, Spirit Level, Drill, Pencil, Hack Saw

1. Cut Blades (A) 5mm shorter than total width of Screen.
2. Cut Side Rails (B) 4mm shorter than total height of Screen.
3. Cut Top/Bottom Capping (C) to total width of Screen.
4. Insert Blades into side Rails (B). Fit top/bottom capping (C).
5. Screw Top/Bottom Capping to side Rails. Screw side Rails to Blades through holes provided.
6. Apply touch-up paint to cut ends of Top/Bottom Rails if required.




HOW TO INSTALL YOUR EASY SCREEN

If using the Easy Screen Fixing Brackets:

1. Remove the two screws from each corner of the screen.
2. Fit bracket in position so the holes line up and re-fit the screws. Repeat for the other brackets as required.
3. Hold the Easy Screen in place and mark hole position.
4. Position screen and screw in place through the Fixing Brackets


Bracket Positioning



If using Easy Screen Mounting Brackets:

1. Mark and cut bracket (A) to required length
2. Fix bracket in position with suitable fixing screws.
3. Position and fix the Mounting Brackets (B) to the back of the Screen using self-drilling screws or rivets.
4. Position and mark the hole to the wall.
5. Fix the Screen to the wall with suitable fixing screws.

Awning Bracket Fixing

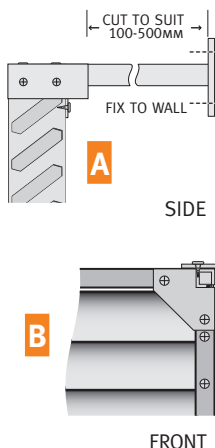

Available at
BUNNINGS
warehouse

PROTECTOR
EST. 1995
ALUMINIUM
FENCING YOU CAN TRUST